




KenflexTM Products

FLEXIBLE DUCT

Kenflex Aluminium Flexible Duct is a flexible, lightweight, aluminium ducting suitable for heating, air conditioning, ventilating and mechanical forced ventilation systems. Suited as a connector to fume ducting on gas heaters, water heaters in partial vacuum, kitchen fume hoods, drying cupboards.

Kenflex Aluminium Flexible Duct is manufactured from aluminium strip, spirally wound to produce a double overlapped joint, which is mechanically locked by a unique process.

Brand	Kenflex
Material	Aluminium
Sizes ID	3"dia – 10"dia
Standard Length	5 meters
Thickness	0.15mm to 0.2mm according to duct ID
Colour	Aluminium
Temperature Range	250°C to 300°C
Pressure	Up to 2500 pa (10"wg)
Compressibility	35% of extended length
Features	An airtight duct, suitable for high or low velocity applications. It is constructed from 99% aluminium; it generates a negligible amount of smoke and toxic gases.

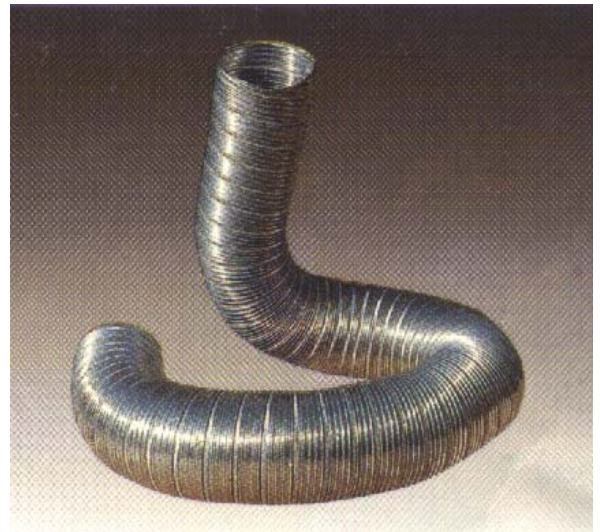

Every effort is made to ensure that the information contained in our literature, drawings and correspondence is accurate, but no warranty is given in this respect and the Company shall not be liable as a result of any inaccuracy. The Company reserves the right to alter at any time without prior notice, the design, specification, packaging or price of any article and without incurring any obligation. All quantities, weight, etc., subject to normal commercial tolerance.