



KenflexTM Products

FLEXIBLE DUCT

Kenflex Insulated Flexible Duct suitable for use in most airconditioning and ventilation systems. Suitable for both hot and cold air. Mainly use to facilitate connections to grilles, diffusers, air/light fixtures, mixing boxes and VAV terminal units.

It is constructed of a tough aluminium laminate and supported by a high tensile steel wire helix.

Brand	Kenflex
Material	Aluminium laminate
Sizes ID	3"dia – 14"dia
Standard Length	10 meters
Colour	Metallic Silver
Temperature Range	-30°C to +120°C
Maximum Velocity	30 m/s
Outer Jacket	Reinforced Aluminium
Fiberglass Thickness	25mm x 16 / 32kg/m³
Compressibility	20% of Extended Length
Feature	Highly Compressible, Low Wastage, Ease of Handling, Lightweight, Non Corrosive, No Misalignment Errors, Minimum Installation Time.




Every effort is made to ensure that the information contained in our literature, drawings and correspondence is accurate, but no warranty is given in this respect and the Company shall not be liable as a result of any inaccuracy. The Company reserves the right to alter at any time without prior notice, the design, specification, packaging or price of any article and without incurring any obligation. All quantities, weight, etc., subject to normal commercial tolerance.



Kenflex™ Products

FLEXIBLE DUCT

FLEXIBLE DUCT PRESSURE LOSS

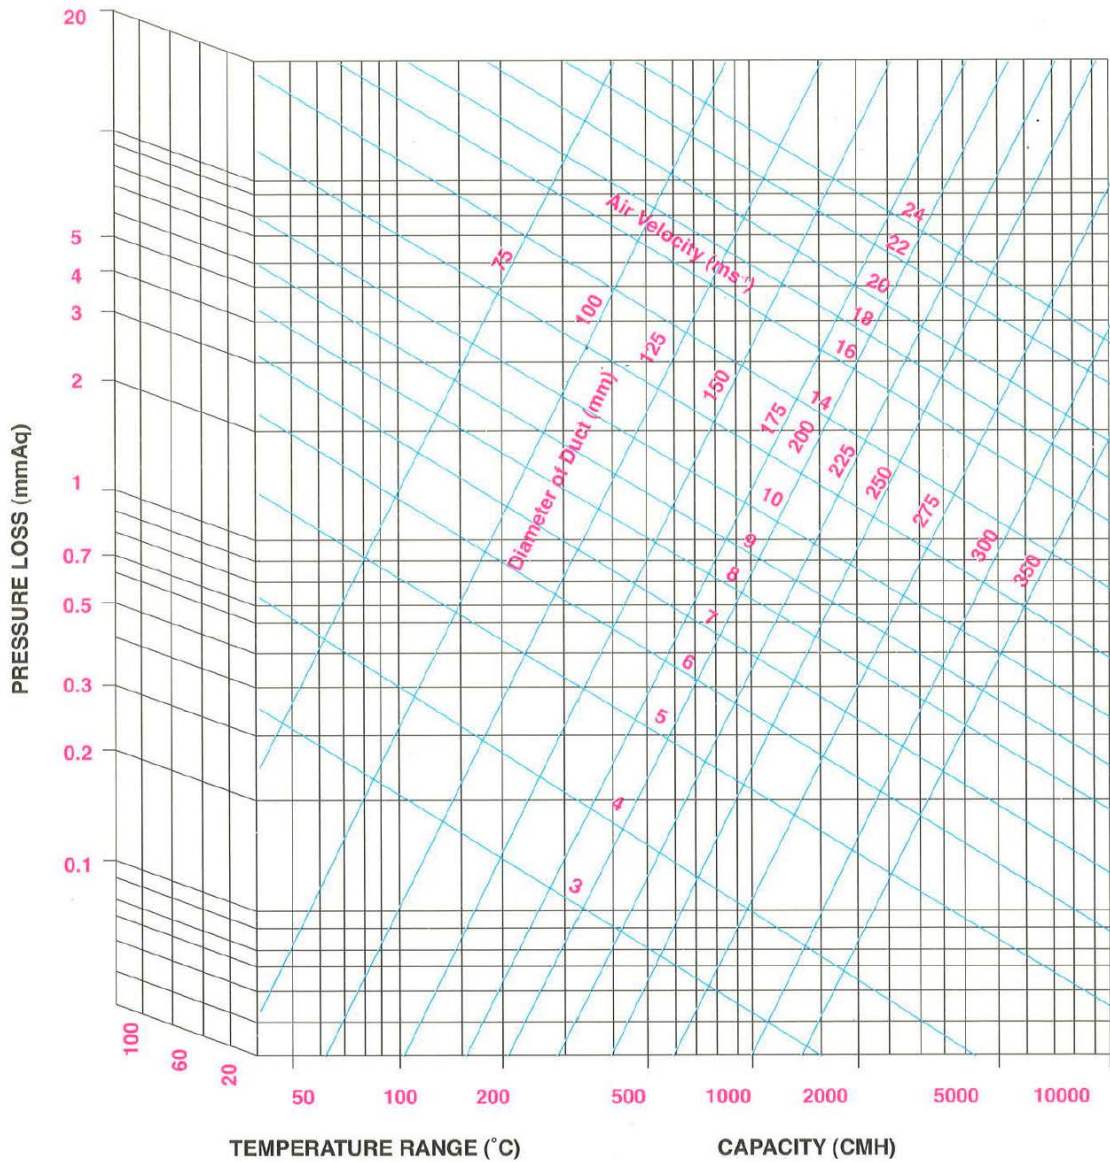

Every effort is made to ensure that the information contained in our literature, drawings and correspondence is accurate, but no warranty is given in this respect and the Company shall not be liable as a result of any inaccuracy. The Company reserves the right to alter at any time without prior notice, the design, specification, packaging or price of any article and without incurring any obligation. All quantities, weight, etc., subject to normal commercial tolerance.