



# Kenflex<sup>TM</sup> Products


---

## FLEXIBLE CONNECTOR

---

**Kenflex Neoprene Flexible Connector** is suitable for Chemicals and Oil flumes, Grease and Acids. It is recommended for Outdoor and Maritime installations, Cooling Towers, Air-Conditioning Systems, Blowers and High Velocity Systems installations.

<b>Brand</b>	<b>Kenflex</b>
<b><u>Fabric Properties</u></b>	
<b>Backing</b>	<b>Glassfibre</b>
<b>Coating</b>	<b>Neoprene</b>
<b>Weight</b>	<b>660 grams per sq meter</b>
<b>Colour</b>	<b>Matt Black</b>
<b>Sizes</b>	<b>6" &amp; 8" (W) x 100ft (L)</b>
<b>Tensile Strength</b>	
<b>Warp</b>	<b>500 ibs per inch</b>
<b>Filling</b>	<b>500 ibs per inch</b>
<b>Heat Resistance</b>	<b>250°F continuously</b>
<b>Temperature Range</b>	
<b>Min.</b>	<b>- 40°C</b>
<b>Max.</b>	<b>120°C Intermittent 100°C Continuous</b>
<b>Mildew Resistance</b>	<b>Not affected by mildew</b>
<b>Fire Standard</b>	<b>BS 476 Part 5 – Not easily ignitable</b>
<b>Features</b>	<b>Airtight, resistance to acids, alkali's, gasoline and grease</b>

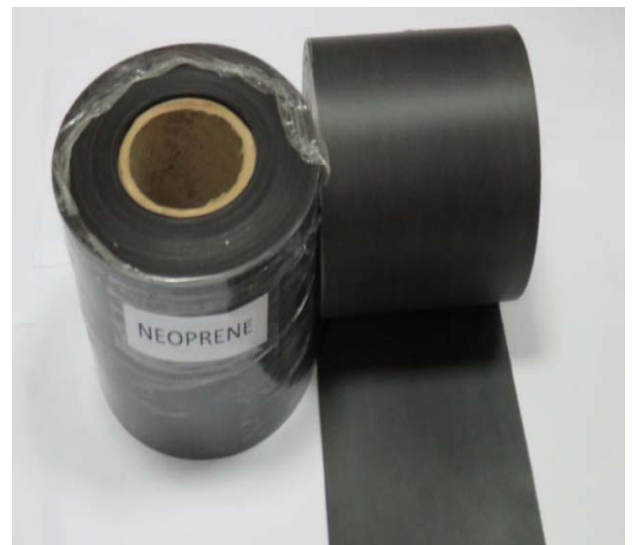

Every effort is made to ensure that the information contained in our literature, drawings and correspondence is accurate, but no warranty is given in this respect and the Company shall not be liable as a result of any inaccuracy. The Company reserves the right to alter at any time without prior notice, the design, specification, packaging or price of any article and without incurring any obligation. All quantities, weight, etc., subject to normal commercial tolerance.